

TI9

Panel cut-out (mm)	Ø 22.5
Characteristics	■ illuminated ■ sealed IP67 ■ round metal bezels ■ red LED ■ green LED ■ red-green LED
Rating	24 VDC 20 mA
Dimensions (mm)	Ø 25
Actuator	■ aluminum housing in different colors
Approvals	none




Popular products

Ordering Reference	Panel cut-out (mm)	Function	Actuator style (mm)	Environmental Protection
TI92VFOA500	Ø 22.5	Visual	Ø 25	IP67

Specifications

Mounting	Central fixing with metal lock nut
Protection	IP67
Housing and actuator material	Anodised aluminum or stainless steel (upon request)
Temperature range °C	-30°C to +70°C
Terminals	Faston - 2.8mm × 0.5mm

Dimensions

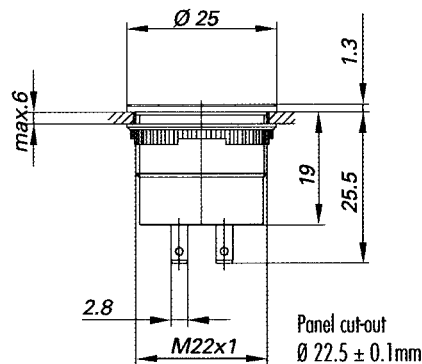

Ordering Reference

Basic type	TI9	Example: TI9	2	VF0A	504
Panel cut-out	2	Ø 22.5 mm			
Switch body	VF0A	Ø 25 mm Visual Indicator IP67; 1NO; Flush Aluminum natural; faston 2.8 mm × 0.5 mm	TH920000	XXX	
	VF1A	Ø 25 mm Visual Indicator IP67; 1NO; Flush Aluminum yellow; faston 2.8 mm × 0.5 mm	TH920001	XXX	
	VF2A	Ø 25 mm Visual Indicator IP67; 1NO; Flush Aluminum green; faston 2.8 mm × 0.5 mm	TH920002	XXX	
	VF4A	Ø 25 mm Visual Indicator IP67; 1NO; Flush Aluminum red; faston 2.8 mm × 0.5 mm	TH920004	XXX	
	VF5A	Ø 25 mm Visual Indicator IP67; 1NO; Flush Aluminum black; faston 2.8 mm × 0.5 mm	TH920005	XXX	
	VF8A	Ø 25 mm Visual Indicator IP67; 1NO; Flush Aluminum dark blue; faston 2.8 mm × 0.5 mm	TH920008	XXX	
Illumination (XXX)	504	Red LED: 24 VDC, 20mA			
	502	Green LED: 24 VDC, 20mA			
	500	Red/Green LED: 24 VDC, 20mA			

Stainless steel versions available upon request.