


2/2 way direct acting solenoid valve, G 1/8"

Common features

Media: water, oil, air
 Media temperature: -10 to +130 °C
 Ambient temperature: -10 to +50 °C
 Body material: brass (CW617N EN 12165)
 Operator material: stainless steel
 Protection class: IP 65 (with connector and gasket)

TYPE: RB214




Normally Open



Dimensions & Weights		RB214
G connection	[ISO 228]	1/8"
A	[mm]	21
B	[mm]	66.5
C	[mm]	1/8"
D	[mm]	9.5
weight	[kg]	0.06

Compressed air

Valve	Nominal Ø	Flow rate Kvs	OPD			Coils	
			min.	max. AC	max. DC	code	[Volts/Hz]
code	[mm]	[l/min]	[barg]	[barg]	[barg]		
RB214CVD	1.7	1.2	0	14	14	2250	24 VDC
						2200	24 V 50/60 Hz
						2400	110 V 50 Hz - 120 V 60 Hz
						2600	200 V 50 Hz - 220 V 60 Hz
						2700	230 V 50 Hz - 240 V 60 Hz

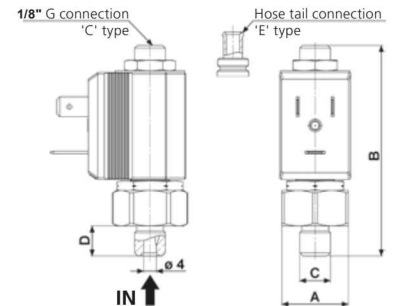

RB214 - FKM seal, NO -

Seal material: foodgrade FKM
 Coil power: AC 10 VA (holding)
 AC 16 VA (inrush)
 DC 7 W

Options

Armature tube with hose tail Ø 6 mm (e.g. code RB214EVD)
 EPDM seal, temperature max. 120 °C (e.g. code RB214CED)