


2/2 way direct acting solenoid valve, G 1/8"


Common features

Media: water, oil, air
 Media temperature: -10 to +130 °C
 Ambient temperature: -10 to +50 °C
 Body material: brass (CW617N EN 12165)
 Operator material: stainless steel
 Protection class: IP 65 (with connector and gasket)

TYPE: RD213



Dimensions & Weights		RD213
G connection	[ISO 228]	1/8"
A	[mm]	Hex 26
B	[mm]	82.5
C	[mm]	4
D	[mm]	9.5
weight	[kg]	0.1

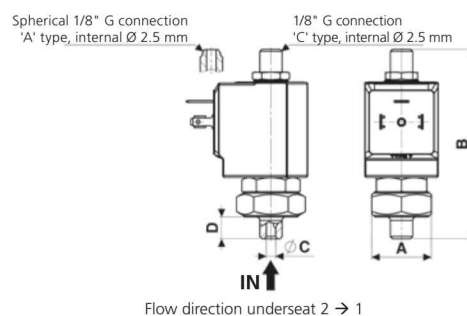

Compressed air

Valve	Nominal Ø	Flow rate Kvs	OPD			Coils	
			min.	max. AC	max. DC		
code	[mm]	[l/min]	[barg]	[barg]	[barg]	code	[Volts/Hz]
RD213CVG	2.5	2.4	0	16	16	7250	24 VDC
						7200	24 V 50/60 Hz
						7400	110 V 50 Hz - 120 V 60 Hz
						7600	200 V 50 Hz - 220 V 60 Hz
						7700	230 V 50 Hz - 240 V 60 Hz

RD213 - FKM seal, NO -

Seal material: foodgrade FKM
 Coil power: AC 18 VA (holding)
 AC 36 VA (inrush)
 DC 14 W

Options

EPDM seal, temperature max. 120 °C (e.g. code RD213CEG)
 Armature tube with spherical 1/8" G connection
 (e.g. code RD213AVG)