


2/2 way direct acting solenoid valve, G 1/4"

Common features

Body material: brass (CW617N EN 12165)
Orifice material: stainless steel (1.4305 EN 10088/AISI 303)
Operator material: stainless steel
Protection class: IP 65 (with connector and gasket)

TYPE: RD236




Normally Open



Dimensions & Weights		RD236
G connection	[ISO 228]	1/4"
A	[mm]	47*
B	[mm]	91
C	[mm]	Hex 22
D	[mm]	20.75
weight	[kg]	0.25

*Since July 2014

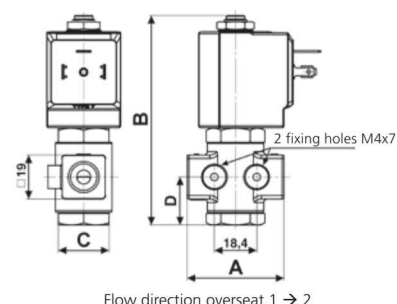

General purpose

Valve	Nominal Ø	Flow rate Kvs	OPD			Coils	
			min.	max. AC	max. DC	code	[Volts/Hz]
code	[mm]	[l/min]	[barg]	[barg]	[barg]		
RD236DVA	1.0	0.5	0	25	25	7250	24 VDC
RD236DVC	1.5	1.3	0	20	20	7200	24 V 50/60 Hz
RD236DVE	2.0	2.0	0	18	18	7400	110 V 50 Hz - 120 V 60 Hz
RD236DVG	2.5	2.8	0	15	15	7600	200 V 50 Hz - 220 V 60 Hz
RD236DVH	3.0	3.5	0	12	12	7700	230 V 50 Hz - 240 V 60 Hz
RD236DVM	4.5	5.5	0	5	5		
RD236DVP	6.0	8.5	0	2	2		

RD236 - FKM seal, NO -

Media: water, oil, air
Media temperature: -10 to +130 °C
Ambient temperature: -10 to +50 °C
Seal material: foodgrade FKM
Coil power: AC 18 VA (holding)
AC 36 VA (inrush)
DC 14 W

Steam

Valve	Nominal Ø	Flow rate Kvs	OPD			Coils	
			min.	max. AC	max. DC	code	[Volts/Hz]
code	[mm]	[l/min]	[barg]	[barg]	[barg]		
RD236DLA	1.0	0.5	0	9	9	7251	24 VDC
RD236DLC	1.5	1.3	0	9	9	7201	24 V 50/60 Hz
RD236DLE	2.0	2.0	0	9	9	7401	110 V 50 Hz - 120 V 60 Hz
RD236DLH	3.0	3.5	0	9	9	7601	200 V 50 Hz - 220 V 60 Hz
						7701	230 V 50 Hz - 240 V 60 Hz

RD236 - FILLED PTFE seal, NO -

Media: steam
Media temperature: -10 to +180 °C
Ambient temperature: -10 to +70 °C
Seal material: Sigodur (filled PTFE)
Coil power: AC 18 VA (holding)
AC 36 VA (inrush)
DC 14 W

Notes

Seamless tube as standard

High pressure

Valve	Nominal Ø	Flow rate Kvs	OPD			Coils	
			min.	max. AC	max. DC	code	[Volts/Hz]
code	[mm]	[l/min]	[barg]	[barg]	[barg]		
RD236DRA1	1.0	0.5	0	180	180	72Z1	24 VDC
RD236DRC1	1.5	1.3	0	150	150	72K1	24 V 50/60 Hz
RD236DRE1	2.0	2.0	0	60	60	74K1	110 V 50 Hz - 120 V 60 Hz
RD236DRG1	2.5	2.8	0	37	37	77K1	230 V 50 Hz - 240 V 60 Hz
RD236DRH1	3.0	3.5	0	28	28		

RD236 - RUBY seal, NO -

Media¹: water, oil, liquids
Media temperature: -10 to +130 °C
Ambient temperature: -10 to +50 °C
Seal material: Ruby
Coil power: AC 25 VA (holding)
AC 50 VA (inrush)
DC 22 W

Notes

Seamless tube as standard

¹ Not 100% leak-proof when used with air/gases.
Approximate leak rate is 1,5 ml/min at max. OPD.