


## 2/2 way pilot operated solenoid valve with assisted lift, G 1/4" – G 1/2"

### Common Features

Media: water, oil, air  
 Media temperature: -10 to +130 °C  
 Ambient temperature: -10 to +50 °C  
 Body material: brass (CW617N EN 12165)  
 Operator material: stainless steel  
 Operator seal material: FKM  
 Main seal and diaphragm material: FKM  
 Protection class: IP 65 (with connector and gasket)


### TYPE: D884/885/886



| Dimensions & weights |           | D884   | D885   | D886   |
|----------------------|-----------|--------|--------|--------|
| G connection         | [ISO 228] | 1/4"   | 3/8"   | 1/2"   |
| A                    | [mm]      | 54     | 54     | 54     |
| B                    | [mm]      | 89     | 89     | 89     |
| C                    | [mm]      | Hex 27 | Hex 27 | Hex 27 |
| D                    | [mm]      | 15     | 15     | 15     |
| weight               | [kg]      | 0.45   | 0.4    | 0.4    |

### General purpose

| Valve   | Nominal Ø | Flow rate Kvs | OPD    |         |         | Coils |                           |
|---------|-----------|---------------|--------|---------|---------|-------|---------------------------|
|         |           |               | min.   | max. AC | max. DC |       |                           |
| code    | [mm]      | [l/min]       | [barg] | [barg]  | [barg]  | code  | [Volts/Hz]                |
| D884DVU | 10.5      | 21            | 0      | 16      | 6       | 7250  | 24 VDC                    |
| D885DVU | 10.5      | 24            | 0      | 16      | 6       | 7200  | 24 V 50/60 Hz             |
| D886DVU | 10.5      | 25            | 0      | 16      | 6       | 7400  | 110 V 50 Hz - 120 V 60 Hz |
|         |           |               |        |         |         | 7600  | 200 V 50 Hz - 220 V 60 Hz |
|         |           |               |        |         |         | 7700  | 230 V 50 Hz - 240 V 60 Hz |
|         |           |               |        |         |         |       |                           |
|         |           |               |        |         |         |       |                           |

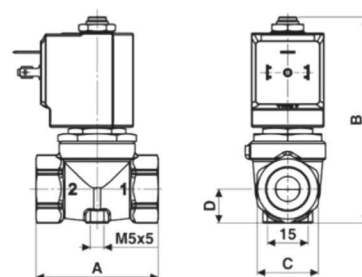

### D884/885/886 - FKM seal, NC -

Coil power: AC 18 VA (holding)  
 AC 36 VA (inrush)  
 DC 14 W