


D634/635/636DTT1 Series, High Pressure – 2/2 Normally Closed

Specifications	
Function (single acting)	 Flow direction overseat 1 → 2
Maximum Viscosity	Max. 21cST (3 °E)
Body Material (Std)	Brass CW617N (EN 12165)
Orifice Material	Stainless Steel 1.4305 EN 10088 (AISI 303)
Flange Tube (Seamless)	Stainless Steel 1.4305 EN 10088 (AISI 303)
Plunger	Stainless Steel 1.4106 EN 10088 (AISI 430F)
Top Stop	Stainless Steel 1.4105 EN 10088 (AISI 430F)
Piston Material	Brass CW614N (EN 12164)
Springs	Stainless Steel AISI 302
Seal Material (Std)	PTFE
Connection Type (Std)	G parallel thread (ISO 228-1)
Shading Ring	Copper
Electrical Characteristics	
High Power Coil Voltage DC (=)	24 V
High Power Coil Voltage AC 50 Hz (~)	24 V, 110 V, 200 V, 230 V
High Power Coil Voltage AC 60 Hz (~)	24 V, 120 V, 220 V, 240 V
Voltage Tolerance	+10% to -15% (AC)
	+10% to -5% (DC)
Duty Cycle	100% ED
Protection Class	IP65 (EN 60529) with plug and gasket correctly fitted *
Electrical Connection	to EN 175301 - 803 - A (ex DIN 43650)
Coil Insulation	Class H 180 °C
Power Rating (High Power)	AC 25 VA (holding) AC 50 VA (inrush) DC 22 W

Features and Benefits

- Pilot operated
- Robust construction for industrial applications
- Stainless steel AISI 430F operators with low residual magnetism
- Manufactured in compliance to RoHS directive and to relevant international standards
- High quality seal materials
- Response time 5 to 25 ms



Pipe Size	Cv (gpm)	Kv (m³/h)	OPD (bar)		Orifice (mm)	Seal Material	Valve Code
			AC Voltages	DC Voltages			
¼"	1.47	1.26	0.3 - 140	0.3 - 35	10	PTFE	D634DIT1
⅜"	1.68	1.44	0.3 - 140	0.3 - 35	10	PTFE	D635DIT1
½"	1.76	1.50	0.3 - 140	0.3 - 35	10	PTFE	D636DIT1


NOTE: Not 100% leak-proof when used with air/gases. Approx leak rate is 1.5ml/min at max OPD.

ATTENTION: when high pressure valves are supplied without a coil, their nameplates display the max OPD of the valve when equipped with an AC (25VA) and DC(22W) coil. If fitting coils with a different power rating OPD will vary, please consult supplier for more details.

Seal Material ¹ and Media Temperature Range	Media	Ambient Temperature Range	
		Min	Max
PTFE (-10 °C to +130 °C)	Water, oil, liquids	-10 °C	+50 °C

¹ See corrosion reference guide and sealing solutions for material compatibility.

D634/635/636DTT1 Series, High Pressure – 2/2 Normally Closed

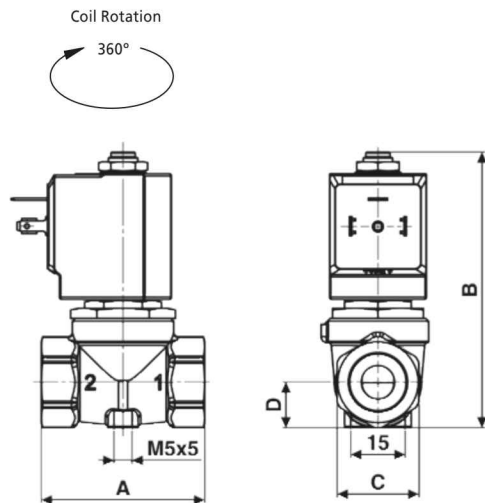

Preferred Valve Mounting Options



Pipe Size	A	B	C	D	Weight (kg)
¼"	54	100	HEX 27	15	0.5
⅜" to ½"	54	100	HEX 27	15	0.45

Dimensions (mm)

Solenoid enclosures

7-K1 & 7-Z1 Type Coil - Insulation class H

External material: PPS (glass fiber & mineral filled)
 Electrical connection: DIN EN 175301-803 form A
 Winding insulation: Class H (E180)
 Enclosure classification: Conforms to IP65 (according to EN 60529) with plug and gasket correctly fitted*



* Plug and gasket not supplied as standard, must be ordered separately.

Type 600 011- Plug

Rated Voltage (max.): 250 VAC / 300 VDC
 Nominal Current: 10A (rated) / 16A (max)
 Wire cross-section: 1.5 mm² max
 Cable Entry: PG9 (6 to 8 mm)
 Enclosure classification: Conforms to IP65 (according to EN 60529) with supplied gasket
 Insulation class: group C- VDE 0110
 Housing colour: black
 UL approved, file No: E205538



Coding chart

Main Valve Assembly

Pipe Size
4 ¼"
5 ⅜"
6 ½"

Coil options

Option	Voltage / Frequency - Class H, High Power
w/o option	72Z1 24 VDC
	72K1 24 V / 50/60 Hz
	74K1 110 V / 50 Hz - 120 V / 60 Hz
	77K1 230 V / 50 Hz - 240 V / 60 Hz

Plug

Plug
w/o plug
0A1 c/w plug

D	6	3	•	D	T	T	1	•	•	•	•	•	•	•	•
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Product coding example:

D634DTT1 72Z1
 ¼" G, auto operation, brass body, PTFE seals, 10 mm orifice, 24 VDC, without plug.