

F1NS

F1NS

- Characteristics
- small size
 - low current
 - long mechanical life
 - PCB mounting
 - sealed IP54 (option)

Rating Up to 250 VAC, 1 A

Dimensions (mm) 16 × 6.5 × 6

- Actuator
- plunger
 - plain lever
 - simulated roller lever/cam follower

Approvals none



Ultraminiature


Preferred Range

Ordering Reference	Actuating Force (N) (ozf)		Sealing	Operating pos. (mm)	Terminal	Circuit	Actuator	Contacts	Electrical rating
F1NST8	2,0	7,2	IP5K4	5,9	PCB	C0	Plunger	Ag	250 VAC, 1 A
F1NST8A1	0,6	2,2	IP5K4	7,6	PCB	C0	Plain lever	Ag	250 VAC, 1 A
F1NST8AC	0,6	2,2	IP5K4	10,1	PCB	C0	Cam follower	Ag	250 VAC, 1 A


Specifications

Housing	Base: PA66 GF30; Cowl: Silicon; Lid: PA 66
Plunger	POM
Mechanism	Snap-action, coil spring mechanism with stainless steel spring. Single-pole change-over contact
Contacts	Fine silver, Gold plate on silver
Terminals	PCB silver plated
Temperature range °C	-40°C bis +85°C
Mechanical life	10 ⁷ cycles minimum (impact-free actuation)
Protection	Enclosure IP40 (F1N), IP54 (F1NS)
Mounting	PCB. Locating pins on housing

Circuit diagram



Dimensions

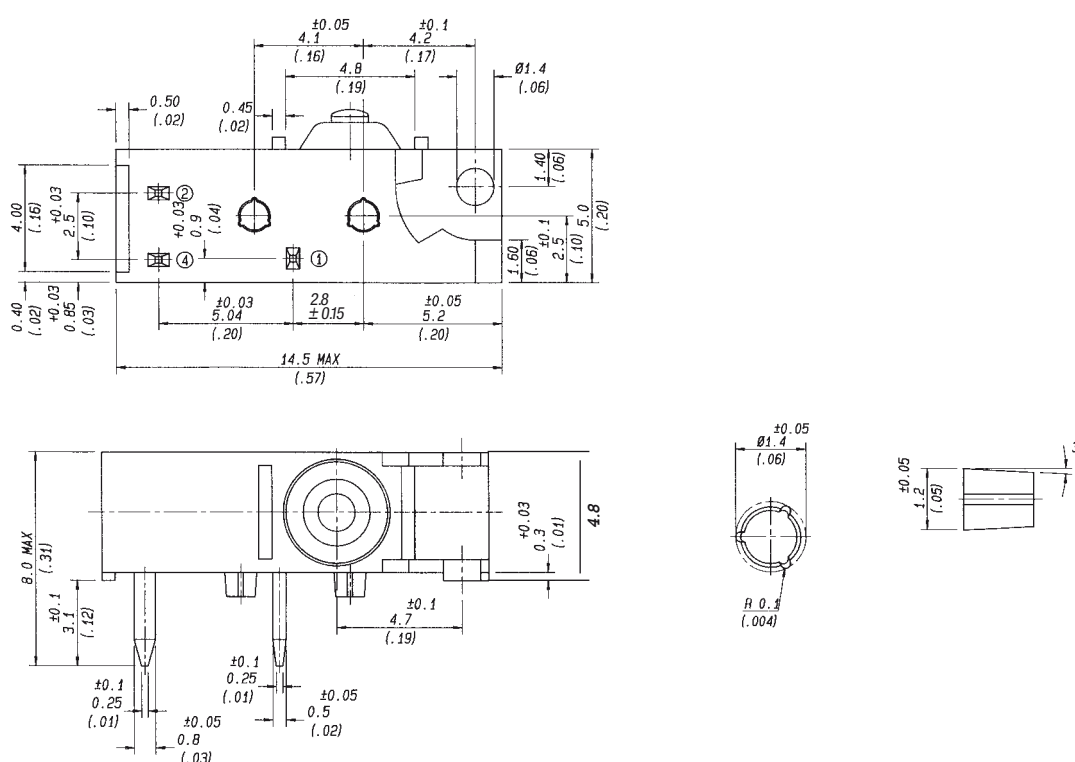

Recommended maximum electrical ratings


Voltage (VAC)	Resistive load (A)	Inductive load (A)	Voltage (VAC)	Resistive load (A)	Inductive load (A)
125	1	1	up to		
250	1	1	30	2	2
			50	0.5	0.5
			75	0.25	0.25
			125	0.2	0.03

Operating Characteristics

Actuator	Reference	Actuating Force		Release Force		Free Position Maximum		Operating Position		Movement Differential Maximum		Total travelled position Maximum	
		(N)	(ozf)	(N)	(ozf)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)
Plunger	F1NST8	2	7.20	0.2	0.72	6.5	0.26	5.9 ± 0.2	0.23 ± 0.008	0.2	0.008	*	




A1-Lever	F1NST8A1	0.6	2.20	0.09	0.32	10.5	0.41	7.6 ± 1.2	0.3 ± 0.05	0.7	0.03	*	
----------	----------	-----	------	------	------	------	------	-----------	------------	-----	------	---	--



Width of lever 3 mm/0.12 in

AC-Lever	F1NST8AC	0.6	2.20	0.09	0.32	13.3	0.52	10.1 ± 1.2	0.4 ± 0.05	0.7	0.03	*	
----------	----------	-----	------	------	------	------	------	------------	------------	-----	------	---	--

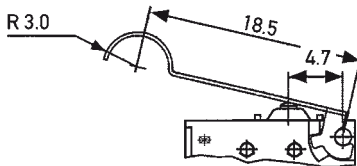

Width of lever 3 mm/0.12 in

Datum for Free Position and Operating Position: base of switch opposite plunger.

* Flush with case. The case should not be used as an end stop.

Ordering Reference

Basic type	F1N	Example: F1N				S	T8	C2	A	AU
Type of sealing	S	No symbol, unsealed Sealed IP5K4								
Terminals	T8	PCB 0.8 × 0.5 × 3.45 long								
Circuit	C2 C4	No symbol, change-over Normally closed Normally open								
Actuators	A A1 AC	No symbol, without lever Special lever A type (see specification) Plain lever 18.0 mm Cam follower lever 18.5 mm								
Contact Material	AU GP	No symbol, Ag Gold on nickel Gold plate on Ag (GP)								
Special Features	/ ☐ ☐ ☐ ☐ Burgess specialise in customer specific solutions. Additional product variants are available or can be provided. If your requirements cannot be satisfied from the options listed, please contact www.saia-burgess.com or your local SB outlet.									