

XC

Characteristics ■ wide range of forces and variants
 ■ long mechanical and electrical life
 ■ solder, PCB and faston terminals

Rating 250 VAC, 10 A max.

Dimensions (mm) 19.9 × 9.5 × 6.4

Actuator ■ Plunger
 ■ mushroom plunger
 ■ plain levers
 ■ simulated roller lever/cam follower
 ■ roller levers

Approvals ENEC, UL, cUL, CSA




Preferred Range

Ordering Reference	Actuating Force (N) (ozf)		Operating pos. (mm) (in)		Terminal	Circuit	Actuator	Contacts	Electrical rating ENEC	UL/CSA
XCG3Z1	1,7	6,07	8,4	0,33	Solder	CO	Plunger	Ag	6(2) A	5 A
XCG3-J1Z1	0,6	2,14	10,2	0,40	Solder	CO	Plain lever	Ag	6(2) A	5 A
XCG3-S1Z1	0,7	2,49	15,6	0,61	Solder	CO	Roller lever	Ag	6(2) A	5 A
XCG5Z1	1,7	6,07	8,4	0,33	Faston 2,8 × 0,5 mm	CO	Plunger	Ag	6(2) A	5 A
XCG5-J1Z1	0,6	2,14	10,2	0,40	Faston 2,8 × 0,5 mm	CO	Plain lever	Ag	6(2) A	5 A
XCG5-S1Z1	0,7	2,49	15,6	0,61	Faston 2,8 × 0,5 mm	CO	Roller lever	Ag	6(2) A	5 A
XCG8-81Z1	1,7	6,07	8,4	0,33	PCB	CO	Plunger	Au	none	0,1 A/125 VAC
XCG8-81-J1Z1	0,6	2,14	10,2	0,40	PCB	CO	Plain lever	Au	none	0,1 A/125 VAC
XCG8-81-S1Z1	0,7	2,49	15,6	0,61	PCB	CO	Roller lever	Au	none	0,1 A/125 VAC
XCF3Z1	3	10,70	8,4	0,33	Solder	CO	Plunger	Ag	10(3) A	10,1 A
XCF3-J1Z1	1,05	3,74	10,2	0,40	Solder	CO	Plain lever	Ag	10(3) A	10,1 A
XCF3-S1Z1	1,1	3,92	15,6	0,61	Solder	CO	Roller lever	Ag	10(3) A	10,1 A
XCG3-U1Z1	1,7	6,07	9,9	0,39	Solder	CO	Mushroom plunger	Ag	6(2) A	5 A
XCG4-U1Z1	1,7	6,07	9,9	0,39	Faston 2,8 × 0,5 mm	CO	Mushroom plunger	Ag	6(2) A	5 A
XCG8-U1Z1	1,7	6,07	9,9	0,39	PCB	CO	Mushroom plunger	Ag	6(2) A	5 A


Specifications

Housing	Melamine-Formaldehyd, Thermosetting
Plunger	POM for T85, PBT for T125, PPS for T150
Mechanism	Snap-action system with stainless steel tension spring
Functions	Change-over, NO, NC
Contacts	Fine silver (Ag) or 10 µm Gold (Au), microprofile
Terminals	Solder, faston and various PCB terminals (side of housing or side of lid, as well as 1/10" o lin pitch)
Temperature range °C	Between -40°C and +85°C (special version up to 140°C)
Mechanical life	up to 5-10 ⁷ cycles (sinusoidal actuation)
Protection	Enclosure IP40
Mounting	Side mounting through mounting holes
Actuators	Stainless steel, PA66-GF35
Contact Carrier	CuZn or CuSn


Circuit diagram





Actuating force/travel



Contact force/travel




Dimensions

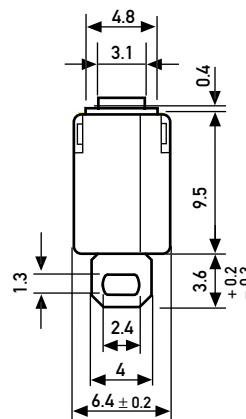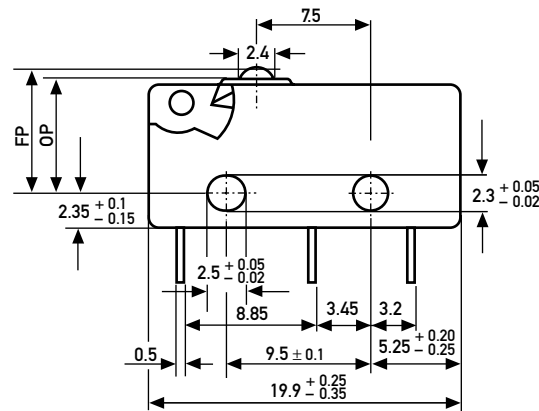

FP = Free Position
OP = Operating Position

Maximum DC rating

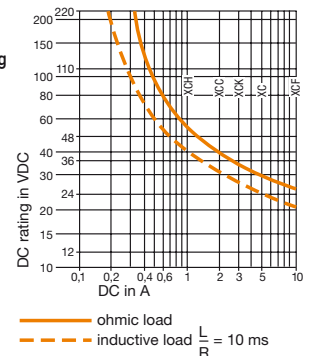

Recommended maximum electrical ratings

	Voltage (VAC)	Resistive load (A)	Motor load (A)	Approvals ENEC (A)		(VAC)	Approvals UL (A)	(VAC)	Motor load
XCF	250	10	3	10 (3)	1E4	250	10,1	125/250	¼HP
XCG	250	6	2	6 (2)	5E4	250	5	250	-
XCK	250	5	3	5 (3)	1E4	250	5	250	-
XCC	250	3	1	3 (1)	5E4	250	2	250	-
XCH	250	1,5	0,3	1,5 (0,3)	5E4	250	1	250	-

Breaking capacities in the tables refer to Ag contacts.

Actuator	Reference	Actuating Force Maximum (N) (ozf)		Release Force Minimum (N) (ozf)		Free Position Maximum (mm) (in)		Operating Position (mm) (in)		Movement Differential Maximum (mm) (in)		Total travelled position Maximum (mm) (in)			
	XCF.. XCG.. XCK.. XCC.. XCH..	3 1.7 1.2 0.6 0.35	10.70 6.07 4.28 2.14 1.24	0.5 0.3 0.2 0.1 0.07	1.78 1.07 0.71 0.36 0.24	8.8 8.8 8.8 8.8 8.8	0.34 0.34 0.34 0.34 0.34	8.4 8.4 8.4 8.4 8.4	+0.1 -0.3	0.33 0.33 0.33 0.33 0.33	+0.003 -0.011	0.1 0.1 0.1 0.1 0.1	0.003 0.003 0.003 0.003 0.003	7.7 7.7 7.7 7.7 7.7	0.303 0.303 0.303 0.303 0.303
	XCF..-U1 XCG..-U1 XCK..-U1 XCC..-U1 XCH..-U1	3 1.7 1.2 0.6 0.35	10.70 6.07 4.28 2.14 1.24	0.5 0.3 0.2 0.1 0.07	1.78 1.07 0.71 0.36 0.24	10.3 10.3 10.3 10.3 10.3	0.41 0.41 0.41 0.41 0.41	9.9 9.9 9.9 9.9 9.9	+0.1 -0.3	0.39 0.39 0.39 0.39 0.39	+0.003 -0.011	0.1 0.1 0.1 0.1 0.1	0.003 0.003 0.003 0.003 0.003	9.2 9.2 9.2 9.2 9.2	0.36 0.36 0.36 0.36 0.36
	XCF.. XCG.. XCK.. XCC.. XCH..	1.05 0.6 0.42 0.22 0.13	3.74 2.14 1.49 0.78 0.46	0.16 0.08 0.056 0.025 0.02	0.57 0.28 0.19 0.08 0.07	12.2 12.2 12.2 12.2 12.2	0.48 0.48 0.48 0.48 0.48	10.2 ± 1.0 10.2 ± 0.9 10.3 ± 0.9 10.3 ± 0.9 10.4 ± 0.9		0.401 ± 0.039 0.401 ± 0.035 0.405 ± 0.035 0.404 ± 0.035 0.409 ± 0.035	0.6 0.5 0.5 0.4 0.4	0.023 0.019 0.019 0.015 0.015	8.4 8.5 8.7 8.7 8.8	0.33 0.337 0.342 0.342 0.346	
Width of lever 4.0 mm/0.16 in															
	XCF.. XCG.. XCK.. XCC.. XCH..	1.1 0.7 0.43 0.23 0.14	3.92 2.49 1.53 0.82 0.49	0.17 0.09 0.058 0.026 0.021	0.6 0.32 0.2 0.09 0.07	17.6 17.6 17.6 17.6 17.6	0.69 0.69 0.69 0.69 0.69	15.6 ± 1.1 15.6 ± 1.0 15.7 ± 1.0 15.7 ± 1.0 15.8 ± 1.0		0.614 ± 0.043 0.614 ± 0.039 0.618 ± 0.039 0.618 ± 0.039 0.622 ± 0.039	0.6 0.5 0.4 0.4 0.4	0.023 0.019 0.015 0.015 0.015	14 14.1 14.3 14.3 14.4	0.551 0.555 0.562 0.562 0.566	
Width of lever 4.0 mm/0.16 in															
	XCF.. XCG.. XCK.. XCC.. XCH..	1.05 0.6 0.42 0.22 0.13		0.16 0.08 0.056 0.025 0.02		17.1 17.1 17.1 17.1 17.1		15.1 ± 1.1 15.1 ± 1.0 15.2 ± 1.0 15.2 ± 1.0 15.3 ± 1.0			0.6 0.5 0.5 0.4 0.4		13.3 13.4 13.6 13.6 13.7		
	XCF.. XCG.. XCK.. XCC.. XCH..	1.05 0.6 0.42 0.22 0.13		0.16 0.08 0.056 0.025 0.02		13.7 13.7 13.7 13.7 13.7		11.7 ± 1.1 11.7 ± 1.0 11.8 ± 1.0 11.8 ± 1.0 11.9 ± 1.0			0.6 0.5 0.5 0.4 0.4		9.9 10.0 10.2 10.2 10.3		
	XCF.. XCG.. XCK.. XCC.. XCH..	1.1 0.7 0.43 0.23 0.14	3.92 2.49 1.53 0.82 0.49	0.17 0.09 0.058 0.026 0.021	0.6 0.32 0.2 0.09 0.07	17.6 17.6 17.6 17.6 17.6	0.69 0.69 0.69 0.69 0.69	15.6 ± 1.2 15.6 ± 1.1 15.7 ± 1.1 15.7 ± 1.1 15.8 ± 1.1		0.614 ± 0.047 0.614 ± 0.043 0.618 ± 0.043 0.618 ± 0.043 0.622 ± 0.043	0.6 0.5 0.4 0.4 0.4	0.023 0.019 0.015 0.015 0.015	14.1 14.2 14.4 14.4 14.5	0.555 0.559 0.566 0.566 0.57	
Width of roller 4.0 mm/0.16 in, for high temperature use -T1 lever															
	XCF.. XCG.. XCK.. XCC.. XCH..	1.3 0.75 0.6 0.31 0.22	4.62 2.67 2.13 1.10 0.78	0.17 0.09 0.058 0.026 0.021	0.6 0.32 0.2 0.09 0.07	17.6 17.6 17.6 17.6 17.6	0.69 0.69 0.69 0.69 0.69	15.6 ± 1.1 15.6 ± 1.0 15.7 ± 1.0 15.7 ± 1.1 15.8 ± 1.0		0.614 ± 0.043 0.614 ± 0.039 0.618 ± 0.039 0.618 ± 0.043 0.622 ± 0.039	0.6 0.5 0.4 0.4 0.4	0.023 0.019 0.015 0.015 0.015	14 14.1 14.3 14.3 14.4	0.551 0.555 0.562 0.562 0.566	
	XCF.. XCG.. XCK.. XCC.. XCH..	1.05 0.6 0.42 0.22 													

Ordering Reference

Basic type	XCF	3 N	10,7 ozf	Example: XCF	4	3	V	-81	-J1	Z1	
	XCG	1,7 N	6,07 ozf								
	XCK	1,2 N	4,28 ozf								
	XCC	0,6 N	2,14 ozf								
	XCH	0,35 N	1,24 ozf								
Circuits	No symbol, change-over										
	4	Normally closed (NC)									
	5	Normally open (NO)									
Terminals	3	Solder									
	4	plug 2.8 × 0.5 mm DIN									
	5	plug 2.8 × 0.5 mm AMP									
	8	PCB, L = 4,5 mm									
	9	PCB, 1/10" pitch, L = 4.5 mm									
	10	PCB, formed to base									
	11	PCB, formed to lid									
	12	PCB, formed to base, 1/10" pitch									
	13	PCB, formed to lid, 1/10" pitch									
	14	PCB, L = 3.5 mm									
15	PCB, 1/10" pitch, L = 3.5 mm										
Version	No symbol, Housing material MF, Europe up to 85°C, UL up to 90°C										
	V	(High temperature 125°C), Housing material MF / Plunger PBT, Europe up to 125°C, UL up to 130°C									
	W	(High temperature 140°C), Housing material MF / Plunger PPS, Europe up to 140°C, UL up to 150°C									
Contacts	No symbol, Ag (Ag)										
	-81	μ profile Au 10 μm									
Actuators	No symbol, plunger										
	-J1	Plain lever	18,0 mm (0.71 in)								
	-J2	Plain lever	25,0 mm (0.98 in)								
	-J5	Plain lever	40,0 mm (1.57 in)								
	-S1	Roller lever	16,0 mm (0.63 in)								
	-L1	Cam follower	16,0 mm (0.63 in)								
	-L6	Cam follower	18,0 mm (0.71 in)								
	-L9	Cam follower	18,5 mm (0.73 in)								
	-P5	Plastic lever	16,0 mm (0.63 in)								
	-P6	Plastic lever	18,0 mm (0.71 in)								
	-U1	Mushroom plunger									
	Other actuators on special request.										
	Approvals	No symbol, ENEC									
Z1		UL, CSA									